

[TIAS BLOG LINK](#)

Note: for those who prefer front side/back side tatting the text in italics and red indicates where the worker needs to use the second half of the ds first.

Abbreviations

R	ring	Ch	chain
p or -	picot	Cl	Close ring
SR	Split ring	Lj	Lock join
RW	Reverse work	vsp	Very small picot
+	join	SS	Switch shuttles
Btwn	between		

Today's Piece

SR18: 6 / vsp 5 Cl
SR19: 4 + (last vsp on previous Ch) 1 / 6 Cl
SR20: 4 / 4 Cl
SR21: 3 vsp 1 / 4 Cl
R22: 1 + (vsp SR21) 12 Cl SS
Ch: 5 Lj (btwn SR21 & SR20) 5 Lj (btwn SR20 & SR19) 6 Lj (btwn SR19 & SR18) 6 Lj (vsp top SR18) 2 RW

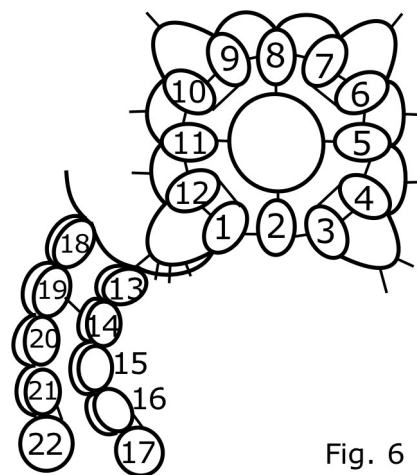


Fig. 6