

[TIAS BLOG LINK](#)

Note: for those who prefer front side/back side tatting the text in italics and red indicates where the worker needs to use the second half of the ds first.

Abbreviations

R	ring	Ch	chain
p or -	picot	Cl	Close ring
SR	Split ring	Lj	Lock join
RW	Reverse work	vsp	Very small picot
+	join	SS	Switch shuttles
Btwn	Between	SCMR	Self closing mock ring

The graduated picots on the SCMR should be from the regular size up to approximately 5/8".

Today's Piece

R23: 6 + (p on Ch btwn R11 & R12) 3 - 3 Cl RW

Ch: 8 RW

R24: 3 + (R23) 3 + (p on Ch btwn R11 & R10) 3 - 3 Cl RW

Ch: 7 vsp 1 RW

R25: 3 + (R24) 5 + (p on Ch btwn R10 & R9) 8 Cl RW

SCMR26: 1 + (vsp last Ch) 3 - 1 - 1 vsp 1 SS

R: (graduated picots) 1 + (vsp SCMR26) 1 - 1

- 1 - 1 - 5 vsp 1 Cl SS

SCMR26: 1 + (vsp R) 4 vsp 2 Cl

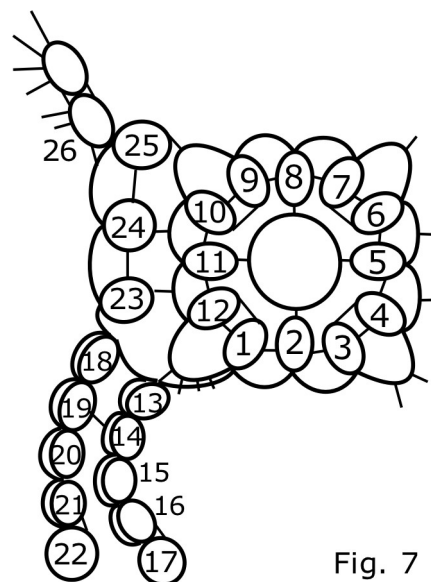


Fig. 7