

[TIAS BLOG LINK](#)

Note: for those who prefer front side/back side tatting the text in italics and red indicates where the worker needs to use the second half of the ds first.

Abbreviations

R	ring	Ch	chain
p or -	picot	Cl	Close ring
SR	Split ring	Lj	Lock join
RW	Reverse work	vsp	Very small picot
+	join	SS	Switch shuttles
Btwn	Between		

Today's Piece

Ch: 2 + (vsp SCMR26) 6 Lj (same p as R25 join) 6 Lj (base R9) 6 Lj (base R8) 6 Lj (base R7) 7 vsp 1 Lj (Ch btwn R7 & R6) SS

SR27: 1 + (vsp last Ch) 6 vsp 1 / 8 Cl

SR28: 1 + (vsp SR27) 6 vsp 1 / 7 vsp 1 Cl

R29: 1 + (vsp SR28) 4 - 6 Cl RW

Ch: 1 + (vsp SR28) 4 vsp 4 vsp 4 RW SS

Ch: vsp 5 Lj (vsp last Ch) 5 Lj (next vsp on Ch) 3 vsp 2 Lj (vsp SR28) SS

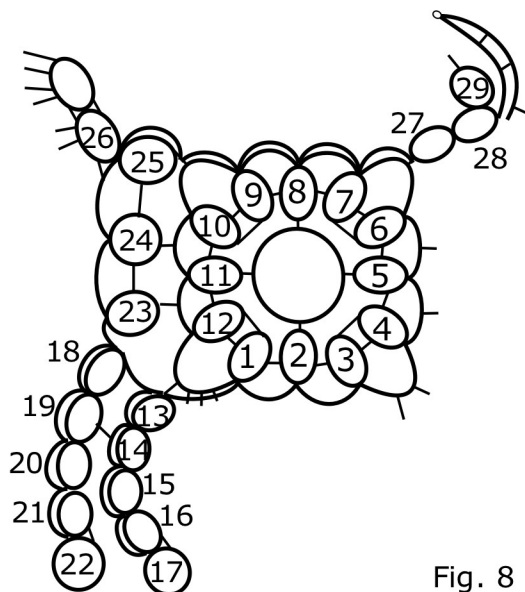


Fig. 8